

FORM PTO-1500 (Mod-ified) (REV 11-98)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER WLJ.067	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/674925)	
INTERNATIONAL APPLICATION NO. PCT/GB00/01383 ✓		INTERNATIONAL FILING DATE 12 APRIL 2000		PRIORITY DATE CLAIMED 14 APRIL 1999 ✓	
TITLE OF INVENTION METHOD AND APPARATUS FOR STABILISING A PLASMA ✓					
APPLICANT(S) FOR DO/EO/US Jyoti Kiron BHARDWAJ et al. ✓					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input type="checkbox"/> A copy of the International Search Report (PCT/ISA/210). 8. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 9. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 10. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). 11. <input type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409). 12. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)). 					
Items 13 to 20 below concern document(s) or information included:					
<ol style="list-style-type: none"> 13. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 14. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 15. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 16. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 17. <input type="checkbox"/> A substitute specification. 18. <input type="checkbox"/> A change of power of attorney and/or address letter. 19. <input type="checkbox"/> Certificate of Mailing by Express Mail 20. <input type="checkbox"/> Other items or information: 					

09/674925

PCT/GB00/01383

WLJ.067

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **\$1,000.00**
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **\$860.00**
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$710.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) **\$690.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) **\$100.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =**\$860.00**Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). ☐ 20 ☐ 30**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	35 - 20 =	15	x \$18.00	\$270.00
Independent claims	2 - 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>	\$0.00

TOTAL OF ABOVE CALCULATIONS =**\$1,130.00**Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐**\$0.00****SUBTOTAL =****\$1,130.00**Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). ☐ 20 ☐ 30 +**\$0.00****TOTAL NATIONAL FEE =****\$1,130.00**Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☒**\$40.00****TOTAL FEES ENCLOSED =****\$1,170.00**

Amount to be:	\$
refunded	
charged	\$

- ☒ A check in the amount of **\$1,170.00** to cover the above fees is enclosed.
- ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **50-0238** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

ADAM C. VOLENTINE
JONES VOLENTINE, LLC
12200 SUNRISE VALLEY DRIVE, SUITE 150
RESTON, VA 20191

TEL. NO. (703) 715-0870
FAX NO. (703) 715-0877

SIGNATURE

ADAM C. VOLENTINE

NAME

33289

REGISTRATION NUMBER

NOV. 8, 2000

DATE

09/674925

529 Rec'd PCT/PTC 08 NOV 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of :
Jyoti Kiron BHARDWAJ et al. : Attn: Applications Branch
Serial No. [New] : Attorney Docket No.: WLJ.067
Filed: November 8, 2000 :
Title: METHOD AND APPARATUS FOR STABILIZING A PLASMA

PRELIMINARY AMENDMENT

Honorable Commissioner of
Patents and Trademarks,
Washington, DC 20231

Sir:

Preliminary to the examination of the above-identified application, please
enter the following amendments and consider the following remarks:

In the Claims:

Please cancel claims 36 and 37 without prejudice.

Please amend the claims as follows:

Claim 3, line 1, delete "or 2".

Claim 4, line 1, change "any one of Claims 1 to 3" to --Claim 1--.

Claim 5, line 1, change "any one of Claims 1 to 4" to --Claim 1--.

Claim 7, line 1, delete "or Claim 6".

Claim 8, line 1, change "any one of Claims 5 to 7" to --Claim 5--.

Claim 10, line 1, change "any one of Claims 7 to 9" to --Claim 7--.

09/674925-110800

Claim 11, line 1, change "any one of Claims 5 to 10" to --Claim 5--.

Claim 13, line 1, change "any one of Claims 5 to 12" to --Claim 5--.

Claim 17, line 1, delete "or Claim 16".

Claim 18, line 1, delete "or Claim 16".

Claim 19, line 1, change "any one of Claims 1 to 18" to --Claim 1--.

Claim 25, line 1, change "any one of Claims 20 to 24" to --Claim 20--.

Claim 26, line 1, change "any one of Claims 1 to 25" to --Claim 1--.

Claim 28, line 1, delete "or 27".

Claim 29, line 1, change "any one of Claims 26 to 28" to --Claim 26--.

Claim 30, line 1, change "any one of Claims 1 to 29" to --Claim 1--.

Claim 31, line 1, change "any one of Claims 19 to 30" to --Claim 19--.

Claim 35, line 2, delete "or 32".

00574925-110300

REMARKS

By this Preliminary Amendment, claims 36 and 37 have been canceled, and claims 3-5, 7-8, 10-13, 17-19, 25-26, 28-31, and 35 have been amended to eliminate multiple dependent claims. Entry of this Preliminary Amendment is respectfully requested.

Respectfully submitted,

JONES VALENTINE, LLC



Adam C. Valentine
Reg. No. 33289

12200 Sunrise Valley Drive, Suite 150
Reston, VA 20191
Tel. No. (703) 715-0870
Fax No. (703) 715-0877

09674925.110800

METHOD AND APPARATUS FOR STABILISING A PLASMA

This invention relates to a method and apparatus for processing a workpiece in which a plasma struck in the chamber is stabilised during the transition between steps, particularly, although not exclusively, steps in a cyclic process in the treatment of the workpiece.

The plasma processing of a wafer or other workpiece may require certain plasma parameters to change between two or more states cyclically. The request for sudden changes in, for example, the gas pressure or discharge power between the states may lead to plasma instability or even lead to the plasma extinguishing.

A particular method to achieve highly anisotropic etches for high aspect ratio trenches is to use a switched process in which an etch step is alternated with a deposition step. Such a method is disclosed in WO-A-94/14187, EP-A-0822582 and EP-A-0822584. In the case of deep trench silicon etching, a passivating layer may be deposited on all surfaces of the wafer (including the trench), during the deposition step. During the initial part of the etch step, the passivating layer is required to be removed preferentially from the bottom of the trench by ion bombardment. This then allows the silicon to be removed by an essentially chemical process, from the bottom of the trench, during the remainder of the etch step. Alternating deposition and etch steps allows a high aspect ratio trench to be etched, contrasting with the use

of the etch step alone which would result in a predominantly isotropic etch. One process gas or gas combination is switched off, or reduced in magnitude, and a second is switched on, or increased in magnitude, in changing from the etch step to the deposition step or vice versa during this cyclic process. During the change from one step to another step, plasma instability or extinguishing of the plasma may result.

This invention discloses ways of improving the plasma stability during each of the transitions.

According to a first aspect of the present invention, there is provided a method of processing a workpiece in a chamber, the method comprising:

- (a) striking a plasma in the chamber;
- (b) treating the workpiece by cyclically adjusting the processing parameters between at least a first step having a first set of processing parameters and a second step having a second set of process parameters; and
- (c) stabilising the plasma during the transition between the first and second steps.

Any suitable workpiece may be used, for example a wafer which typically may be formed of silicon.

Of course, more than two steps may be used in the treatment of the workpiece. When a cyclic process is used, the plasma is preferably stabilised between each cyclic step. The method is particularly applicable where a workpiece is treated by cyclically carrying out

09574925.110800

alternating etch and deposition steps.

The method further comprises supplying power to the plasma. For example, RF power may be inductively coupled into the plasma.

5 In one embodiment, the plasma may be stabilised by matching the impedance of the plasma to the impedance of the power supply which provides energy to the plasma by means of a matching unit. The given method of impedance matching is well known to those skilled in the art.

10 The matching unit may comprise, for an inductive load, two or more variable capacitors, possibly with additional fixed capacitors. Alternatively, variable inductors may be used with appropriate fixed capacitance.

15 The matching unit may be adjustable manually or electrically, although any suitable method of adjustment may be used. Preferably, when the plasma strikes, the plasma impedance is matched to the power supply impedance automatically for at least a part of the time of treatment of the workpiece. The matching unit may be pre-set to act
20 in time at or just before the transition between the first and second steps, or indeed between all steps where more than two treatment steps are used. For example, in a switched etch/deposition process, the matching unit may be pre-set at or just before the transition between an etch
25 step and a deposition step, or a deposition step and an etch step, in the cyclic process. In such an embodiment, the auto-matching may be re-enabled when the chamber pressure and/or other parameters have stabilised. In one

embodiment, the automatic matching is disabled at or slightly before the transition. The pre-setting may be determined from a previous step of the same type in a cyclic process.

5 The matching unit may be driven by a motor. In one embodiment control signals are used to drive the motor and may be modified to track impedance changes rapidly, in order to minimise or eliminate "overshoot" as described in detail below.

10 In one embodiment, the matching unit comprises capacitors having set initial values for succeeding steps of the same type which are ramped or otherwise adjusted during the overall process. In a particular case the initial values for a step of one type may be obtained from
15 the values found from automatic matching at the end of the previous step of the same type.

 The capacitors in the matching unit may be adjusted to different values for each of the steps, but in conjunction to this or alternatively, the frequency of the
20 power supply may be altered, either by a direct command or by an automatic control circuit. Frequency adjustment of the power supply to achieve matching of power into a plasma can be utilised to reduce or eliminate the need to adjust matching unit capacitor values. Generally
25 frequency control is achieved on a short time scale and therefore automatic adjustments can occur at a much faster rate than it is possible to adjust capacitor values mechanically. However, pre-setting of the frequency for

00574925-110800

each of the steps may be a desirable feature under some circumstances.

- For an industry standard 13.56 MHz power supply, the frequency variability required would be typically $< +/-0.5$ MHz, but with $+/-1.0$ MHz in extreme cases. Here one embodiment would include fixed matching unit capacitor positions, which did not vary between etch and deposition steps, and either a pre-set or automatically adjusted frequency of the RF from the power supply. Another embodiment would be to fix the matching unit capacitor positions to different appropriate settings for etch and deposition steps, and then either a pre-set or automatically adjust the frequency of the RF from the power supply.
- As an alternative to, or in addition to, the matching unit described above, the plasma may be stabilised by substantially preventing or reducing variation of the pressure in the chamber between the first and second steps. When this is used in relation to a cyclic etch/deposition process, the deposition gas may be supplied, or increased in flow rate, before the etch gas is switched off, or reduced in flow rate, and the etch gas may be supplied, or increased in flow rate, before the deposition gas is switched off, or reduced in flow rate, during the cyclic process.

Thus, when a transition occurs from an etch to a deposition step, or from a deposition step to an etch step, the two types of gases may be allowed to enter the

00674025.110800

process chamber simultaneously during the transition.

Furthermore, either of the etch or deposition gases may be allowed to flow throughout the switched process or for a significant proportion of it. Thus, the deposition gas

5 may continue to flow throughout the etch step in addition to the deposition step, but in most circumstances at a much reduced rate, while the etch gas is only permitted to flow during the etch step. Alternatively the etch gas could continue to flow throughout the deposition step in
10 addition to the etch step, but normally at a much reduced rate, while the deposition gas is only permitted to flow during the deposition step.

Another possibility is that both etch and deposition gases could be allowed to flow simultaneously and
15 continuously as may be required to achieve a particular process result. However, the respective flow rates of the gases would generally vary for each of the steps. The flow rate of the etch gas will usually be much greater than the flow rate of the deposition gas during the etch
20 step, and the flow rate of the deposition gas greater than the etch gas during the deposition step, so as still to maintain discrete etch and deposition steps.

The addition of deposition gas into the etch step and/or the addition of etch gas into the deposition step,
25 enhances profile and sidewall roughness control. The mixing of the gases will generally reduce the plasma impedance transient. If sufficient deposition gas cannot be added into the etch step (and vice versa) to reduce the

00571925-110800

transient, then a higher flow rate of gas can be introduced during the transient period only.

09674925-11800

The plasma may be stabilised by feeding a further gas into the chamber. This "buffer" gas reduces the variation in the pressure from the first to the second step, for example. Thus, in a cyclic etch/deposition process, the buffer gas reduces the variation in the pressure between each etch and deposition step or vice versa. The gas may be fed into the chamber by means of a fast acting flow controller. The "buffer" gas may be any suitable gas, although is typically a noble gas (for example helium or argon), oxygen or nitrogen or a mixture thereof. A preferred "buffer" gas is helium.

The method may further comprise monitoring the pressure in the chamber and adjusting the flow of gas accordingly. In one embodiment, there is at least some flow of the gas during the whole process. In one embodiment, the gas may be supplied throughout at least one step in the treatment of the workpiece.

The total pressure in the chamber may be ramped during a particular step.

In addition, or alternatively, a further means of reducing pressure variation in the chamber may be provided. Thus, the chamber may be provided with a portion (which in one embodiment may be in the form of a side chamber) separated from the main part of the process chamber by a deflectable member, for example a flexible membrane. The separated portion is preferably of a volume

which is large compared to the main part of the process chamber. The membrane can then flex to adjust for pressure changes, to some extent, within the main part of the process chamber.

5 According to a second aspect of the present invention, there is provided a plasma processing apparatus comprising a chamber having a support for a workpiece, means for striking a plasma in the chamber, means for cyclically adjusting processing parameters between a first
10 step and a second step, and means for stabilising the plasma during the transition between the first and second steps.

000011 5204250
000011 5204250
15 The stabilising means may comprise a matching unit for matching the impedance of the plasma to the impedance of a power supply which supplies power to the plasma. Alternatively, or additionally, the stabilising means may comprise a means to vary the RF power supply frequency or may comprise means for reducing the variation of the pressure in the chamber between the first and second
20 steps, for example means for feeding a gas into the chamber. This gas is the "buffer" gas described above.

25 Although the invention has been defined above, it is to be understood that it includes any inventive combination of the features set out above or in the following description.

 The invention may be performed in various ways and specific embodiments will now be described, by way of example, with reference to the accompanying drawings, and

in which:

Figure 1 shows graphically how etch and deposition gas flows and chamber pressure may vary during a switched process;

5 Figure 2 shows how the sequence of operations according to the invention may be carried out;

Figures 3(a) and (b) show how the value of a capacitor in a matching unit may vary during a switched process;

10 Figures 4(a) and (b) show graphically how the flow of buffer gas may be adjusted in response to chamber pressure;

Figure 5 shows a block schematic diagram of a matching unit control circuit;

15 Figure 6 shows a typical configuration of a matching unit circuit diagram; and

Figure 7 shows a schematic diagram of a typical configuration of a gas supply system.

Referring to Figure 1, the flow of deposition gas and
20 etch gas and the chamber pressure is shown during a typical etch/deposition cyclic process. In changing from the etch step to the deposition step or vice versa, the process gas is switched. That is the mass flow controller, or alternative means (such as an actuating
25 device which diverts the gas flow around the process chamber), controlling the first gas, is switched off, and the mass flow controller controlling the second gas is switched on. The switching on or off of each process gas

may be on a reasonably short time scale, or one or other action may be more gradual, over a longer time scale.

There may or may not be a period during which both types of process gas are being fed to the process chamber

5 simultaneously, as the flow of one is being reduced and the flow of the other is being increased. The required flow levels of the two gases may be quite different and also the pressures required in the process chamber during each of the steps may be significantly different.

10 For a plasma processing apparatus in which radio frequency power is inductively coupled into the plasma, a matching unit of some form may be used to match the impedance of the RF power supply to the impedance of the plasma. For the different gases and different chamber
15 filling pressures for each of the steps described above, the plasma impedance is likely to differ. This leads to a requirement for the matching unit settings to change during the switching from one step to the next. Usually
20 this pressure transition is abrupt rather than gradual, with time constants less than the ability of the matching network to respond without an interim impedance "mismatch" resulting in reflection of a proportion of the power supplied.

25 In addition to the changes in process gas and chamber pressure between different steps, it is quite likely that the plasma and radical densities (and therefore the discharge power) required for each step will be different. This is another factor that can further enhance the

difference in the plasma impedance between the different steps of a multi-step process.

To achieve a maximum overall etch rate from a multi-step process, it is desirable that the power supply impedance is matched to the plasma impedance throughout each step. It can be extremely detrimental to the processing if, after the switch from one step to the next, the plasma is unstable and not properly matched for a significant proportion of the respective step. In the extreme case of the plasma extinguishing during the transition from one step to the next, etch or deposition process time will be lost until the plasma is re-ignited, leading respectively either to a reduced etch depth or to a thinner deposited layer than required, either of which could produce severe distortion to a trench profile which requires a finely balanced, switched process.

Two particular embodiments of the invention are as follows:

- 1) To control the matching unit during the transition from one step to the next and preferably immediately afterwards, in order to minimise the time when the plasma impedance is not properly matched to the power supply impedance.
- 2) To control the supply of a buffer gas to the chamber so that it reduces the overall variation in process chamber pressure and hence plasma impedance.

These may be used separately or both parts may be used together.

1) Matching unit control

As stated previously, the function of the matching unit is to match the plasma impedance to the power supply impedance. The power supply impedance will usually be fixed at a value of 50 ohms. The matching unit used for an inductive load will normally contain two or more variable capacitors with possibly additional fixed capacitors. Alternatives may use variable inductors with appropriate fixed capacitance.

In its simplest form the matching unit may be manually adjustable to obtain the best match between plasma and power supply impedances. However, this technique may be difficult to use, if the impedance of the plasma load changes significantly between striking the plasma and steady operation i.e. the impedance of the antenna alone is seen before the plasma is struck, whereupon the impedance becomes that of antenna and plasma combined. For a switched process it would normally be impracticable to control manually the impedance matching elements at the required rate.

An alternative matching unit utilising variable capacitors will usually use small electric motors, each driving one or more capacitors, and one embodiment is shown in Figure 5. A dc or ac motor may be used, with a servo potentiometer to feedback capacitor setting, or alternatively a stepper motor/indexer arrangement may be used. Appropriate control circuitry allows the setting of each capacitor to be adjusted to a selected point before

008011-52647960

the plasma is struck.

When the plasma strikes, error signals relating to the real and imaginary parts of the plasma impedance can be detected, amplified and used to control the settings of the capacitors to achieve a stable match of the plasma impedance to the power supply impedance. This auto-matching ensures that, for a simple etch or deposition process, power is efficiently coupled into the plasma throughout the length of the process, even when conditions vary over a significant range during the process.

In a switched process, the switching may occur at intervals of several seconds, but greater or lesser periods may be used. The auto-matching should be capable of tracking the changes in plasma impedance during each step but, during the switch from one step to the next, the impedance change may be very rapid over a period of around one second or even less. The rapid impedance change may be due to, for example, a sudden pressure drop as one process gas is turned off and before the second gas has had time to reach its stable level. Furthermore, gas fragmentation by the plasma leads to a pressure increase and this effect becomes more pronounced as the power fed into the plasma is increased. Differences in the degree of gas fragmentation by the plasma as the gas changes, in a switched process can cause changes in the pressure, even for constant RF power feed. The auto-matching may try to track the impedance change due to the reducing pressure, only to find it reversing almost immediately. The

inability to follow the changes quickly enough may result in an impedance mis-match which may not be corrected, until a significant fraction of the time allocated to the second step has elapsed. This is clearly not a desirable situation.

Thus, in one embodiment, the invention discloses the pre-setting of the matching unit settings at, or just before, the switch from one step to the next, and then re-enabling the auto-match system when chamber pressure and/or other appropriate parameters have stabilised.

In detail, for a two step process involving a deposition step followed by an etch step followed by a further deposition step, a further etch step and then many repetitions of the sequence, it is assumed that the plasma has been struck initially and the description is of an arbitrary stage in the sequence. As the switch occurs to the deposition step, the matching unit settings are driven to pre-determined values that will be close to those required for stable plasma operation in the deposition step. After a period of time, related to the time that the chamber pressure, or other relevant parameter, takes to stabilise, the auto-matching facility is enabled to allow tracking of the plasma impedance. As the end of the deposition step is reached, the auto-matching is disabled and the matching unit settings are set to those required for the etch step. Again, after a pre-set period of time, based on the time that the chamber pressure, or other parameter, takes to stabilise, the auto-matching is re-

enabled. The etch plasma impedance is then tracked by the auto-matching facility until the end of the etch step when the auto-matching is again disabled, and the matching unit settings are driven to the values required for the deposition step. The sequence of operations is shown in Figure 2.

The technique of enabling the auto-match facility during the bulk of the etch and deposition steps, but disabling the facility during the period of switching from one step to the next, permits greater proportions of each step to be more effectively used for the respective process and helps to ensure a smoother transition between the steps. The technique may be used on its own or in conjunction with other techniques such as the injection of a buffer gas, to reduce the pressure transient, during the period of switching from one step to the next.

It has been stated that the auto-matching may be disabled at the end of each step. However, in one embodiment, it may be advantageous to disable it slightly before the end of a step, in order to allow sufficient time for matching unit settings to be pre-set to those required for the next step, particularly if these are significantly different from those in use for the current step.

By matching unit settings, the reference is in general to the setting positions of variable capacitors in the match unit, which are used to match the real and imaginary parts of the complex plasma impedance to the

power supply impedance, as shown in Figure 6. Auto-matching allows the match unit to compensate for both components of the complex plasma impedance automatically, utilising detected error signals and a simple control loop. Although there is some interaction between the actions of the capacitors, it may be considered that one or more capacitors is used to match the real part of the impedance and one or more capacitors is used to match the imaginary part of the impedance.

In the embodiments of the invention described, when relating to the enabling and disabling of the auto-matching at different times during a switched process, the enabling and disabling may apply to the action on either or both components of the complex impedance. Therefore, it may be considered appropriate during a particular switched process to allow the capacitor(s) relating to, for example, the real part of the impedance to remain under auto-match control throughout, whilst enabling and disabling the auto-match on the capacitor(s) relating to the imaginary part of the impedance.

The settings of the matching unit capacitors, when not in auto-match mode, may be learnt from the previous step of the same type. For example, in a cyclic etch/deposition process, the settings used when starting an etch step may be those recorded towards the end of the auto match period during the previous etch step. This enables an additional adaptive element to be incorporated into the system.

Figure 3 shows how the value of a capacitor in the matching unit may vary during a switched process, with (a) non-adaptive and (b) adaptive initial setting, as described above. In Figure 3(a) the capacitor is set to a fixed value in the initial stage of each deposition step. It is also set to a second fixed value in the initial stage of each etch step. During the remainder of each step, the matching unit is switched to auto-match and the capacitor is driven appropriately. In Figure 3(b), during the initial stage of each deposition step, the capacitor is set to the value recorded near the end of the previous deposition step. Also during the initial stage of each etch step, the capacitor is set to the value recorded near the end of the previous etch step. During the remainder of each step, the matching unit is switched to auto match and the capacitor is driven appropriately.

To prevent the plasma from extinguishing during the transition phase, it is necessary to deliver sufficient power to the plasma. This is only possible if the matching unit can track the change in plasma impedance fast enough so as to keep the impedance seen by the RF supply within the range into which the RF generator is designed to operate into. If the impedance goes outside this range, then the generator cannot supply the required power and hence the plasma may be extinguished. The response of the matching unit can be speeded up by simply increasing the gain of the amplifiers that power the motors that drive the capacitors. However, this has the drawback that the

matching unit tends to overshoot the desired impedance as the motors are driven in "open loop" by signals that give an indication of the level of mismatch of the real and imaginary parts of the required impedance.

5 To minimise or eliminate overshoot, feed forward compensation can be applied to the motor drive signals. This compensation method provides a predictive element which can then be used to modify the drive signals such that impedance changes can be tracked rapidly without
10 overshooting. The technique can be implemented in an analogue form by using active devices such as operational amplifiers in conjunction with resistors and capacitors to form the required compensation network. An alternative implementation involving more complicated and
15 sophisticated methods can be applied by using a micro-controller with a stored algorithm. This monitors the various parameters that affect plasma impedance such as pressure, power and gas flow, and then uses this information to predict and modify the drive outputs with
20 weighted coefficients set by switches or downloaded from a PC.

Although it increases the complexity of the system, it is possible that the values to which the matching unit capacitors are set for succeeding steps of the same type,
25 for example etch steps, may be ramped in value during the overall process to provide the best settings which allow for ramping of other process parameters such as chamber pressure or power supplied to the plasma.

2) Provision of a buffer gas

If the pressure within the process chamber is prevented from varying by a significant amount during a switched process, then the plasma impedance variation generally will be reduced.

During the transition from an etch step to a deposition step, or vice versa, the mass flow controller delivering one process gas is switched off and the mass flow controller delivering the other process gas is activated. By judicious choice of the timing of the switch-off and switch-on signals, to allow for the delays involved in the valves closing and opening respectively, it is possible to reduce the pressure transient at the transition. This normally involves switching on the second process gas slightly before the first process gas is switched off (because a mass flow controller requires a finite time to shift from fully closed to flow control), thereby allowing the etch and passivation gases to mix during this overlap stage.

Although adjustment of the timings for the on and off operations of the respective mass flow controllers will help to reduce pressure transients in the process chamber, it is likely that there will still be some pressure fluctuation which will affect the plasma impedance and potentially lead to plasma instability. Gas fragmentation by the plasma leads to a pressure increase. This effect becomes more pronounced as the power fed into the plasma is increased. As industry requires ever higher process

rates and these are related to the power fed into the plasma, gas fragmentation on application of power (and therefore pressure increase) will become more significant. The degree of gas fragmentation will vary with the process gas used. Therefore, in a high power switched process, there may be a significant pressure variation due to this factor alone. The invention described may provide a means for reducing the pressure transient in the form of the feeding of a buffer gas into the process chamber, controlled by a fast acting flow controller or other means, so that the chamber pressure is maintained close to a constant value, as shown in Figure 7. In this embodiment, the control loop comprises a pressure monitor on the process chamber feeding control circuitry, which then adjusts the flow of the buffer gas to provide a close to constant total pressure in the process chamber. Clearly, to be effective the flow controller should be fast acting and may need to feed directly into the process chamber as opposed to through process gas manifolding. To minimise response time, the flow controller in general allows some flow of buffer gas all the time, with flow increased on demand. The buffer gas may be helium, but other gases may also be used.

It may be found desirable to allow a significant flow of buffer gas throughout one or more steps of a two or more step switched process, in which the pressure requirements for the respective process gases differ, in order to keep the total pressure in the process chamber

00574925-110800

near to constant. Figure 4(b) shows how the flow of buffer gas might be adjusted if the chamber pressure varied as in Figure 4(a) without the addition of any buffer gas. Ramping up or down of total pressure during a particular step may be used to allow a smooth transition to the next step, thereby producing a slow change in plasma impedance which can easily be handled by an RF matching unit. This is in addition to smoothing out pressure transients, and resulting plasma impedance changes, at the time of switching from one step to the next.

The incorporation of the additional control system for injecting the buffer gas into the process chamber, must be compatible with the existing control system. Potential conflicts exist, for example, in the use of an existing automatic pressure control system that adjusts the chamber pressure by restricting the flow of gas exhausting from the chamber, and such conflicts may be addressed easily.

As a further means of reducing pressure excursions in the process chamber, a secondary portion of the process chamber, or a side chamber attached to it, may be separated from the primary process chamber by a flexible membrane structure. The primary part of the process chamber contains the wafer, support means and means for generating the plasma. For pressures initially equal, or almost so, on either side of the structure, a pressure increase or decrease in the primary part of the process

09674925-110800

chamber will result in a deflection of the membrane, the deflection being such as to increase the volume of the primary chamber if the pressure in the primary chamber has increased, or decrease the volume if the pressure in the primary chamber has decreased. This increase or decrease in the volume of the primary portion of the process chamber results in a reduction in the pressure excursion experienced in this chamber.

To be most effective in minimising pressure excursions, the volume of the secondary part of the process chamber, or the side chamber, must be large in comparison with the volume of the primary part of the process chamber. This makes this technique less practicable for systems in which the volume of the primary portion of the process chamber is large, but potentially applicable to smaller process chambers.

00574925.110300

CLAIMS

(a) striking a plasma in the chamber;

0 (c) stabilising the plasma during the transition
between the first and second steps.

3. A method according to Claim 1 or 2, wherein the workpiece is treated by cyclically carrying out alternating etch and deposition steps.

5. A method according to any one of Claims 1 to 4,

6. A method according to Claim 5, wherein the matching unit is adjustable manually or electrically.

25 7. A method according to Claim 5 or Claim 6, wherein the plasma impedance is matched to the power supply impedance automatically for at least a part of the time of treatment

of the workpiece.

8. A method according to any one of Claims 5 to 7,
wherein the matching unit is pre-set to act in time at or
just before the transition between the first and second
5 steps.

9. A method according to Claim 8, wherein automatic
matching is enabled when the chamber pressure and/or other
parameters have stabilised.

10. A method according to any one of Claims 7 to 9,
wherein the automatic matching is disabled at or slightly
before the transition.

11. A method according to any one of Claims 5 to 10,
wherein the matching unit is driven by a motor.

12. A method according to Claim 11, wherein control
15 signals are used to drive the motor and are modified to
track impedance changes rapidly.

13. A method according to any one of Claims 5 to 12,
wherein the matching unit comprises capacitors having set
initial values for succeeding steps of the same type which
20 are ramped or otherwise adjusted during the overall
process.

14. A method according to Claim 13, wherein the initial
values for a step of one type are obtained from the values
found from automatic matching at the end of the previous
25 step of the same type.

15. A method according to Claim 13, wherein the
capacitors in the matching unit are adjusted to different
values for each of the steps, and/or the frequency of the

power supply is altered, either by a direct command or by an automatic control circuit.

16. A method according to Claim 15, wherein frequency adjustment of the power supply or pre-setting of the

5 frequency for each of the steps to achieve matching of power into a plasma is utilised to reduce or eliminate the need to adjust matching unit capacitor values.

17. A method according to Claim 15 or Claim 16, including fixed matching unit capacitor positions, which do not vary
10 between etch and deposition steps, and either a pre-set or automatically adjusted frequency of the RF from the power supply.

18. A method according to Claim 15 or Claim 16, including fixing of the matching unit capacitor positions to
15 different appropriate settings for etch and deposition steps, and then either pre-setting or automatically adjusting the frequency of the RF from the power supply.

19. A method according to any one of Claims 1 to 18, wherein stabilisation of the plasma is enhanced by
20 substantially preventing or reducing variation of the pressure in the chamber between the first and second steps.

20. A method according to Claim 19, wherein, during a cyclic etch/deposition process, the deposition gas is
25 supplied, or increased in flow rate, before the etch gas is switched off, or reduced in flow rate, and the etch gas is supplied, or increased in flow rate, before the deposition gas is switched off, or reduced in flow rate.

00674025.110800

21. A method according to Claim 20, wherein either of the etch or deposition gases are allowed to flow throughout the switched process or for a significant proportion of it.
- 5 22. A method according to Claim 21, wherein the deposition gas continues to flow throughout the etch step in addition to the deposition step, but normally at a much reduced rate, while the etch gas is only permitted to flow during the etch step.
- 10 23. A method according to Claim 21, wherein the etch gas continues to flow throughout the deposition step in addition to the etch step, but normally at a much reduced rate, while the deposition gas is only permitted to flow during the deposition step.
- 15 24. A method according to Claim 21, wherein both etch and deposition gases are allowed to flow simultaneously and continuously.
25. A method according to any one of Claims 20 to 24, wherein the respective flow rates of the gases generally
- 20 vary for each of the steps.
26. A method according to any one of Claims 1 to 25, wherein stabilisation of the plasma is enhanced by feeding a further gas into the chamber.
- 25 27. A method according to Claim 26, wherein the further gas is fed into the chamber by means of a fast acting flow controller.
28. A method according to Claim 26 or 27, wherein the further gas is selected from helium, argon or other noble

00874925.110800

gas, oxygen or nitrogen or a mixture thereof.

29. A method according to any one of Claims 26 to 28, further comprising monitoring the pressure in the chamber and adjusting the flow of the further gas accordingly.

5 30. A method according to any one of Claims 1 to 29, wherein the total pressure in the chamber is ramped during a particular step.

31. A method according to any one of Claims 19 to 30, wherein the chamber is provided with a portion separated
10 from the main part of the chamber by a deflectable member.

32. A method according to claim 31, wherein the separated portion is of a volume which is large compared to the main part of the chamber.

33. A plasma processing apparatus comprising a chamber
15 having a support for a workpiece, means for striking a plasma in the chamber, means for cyclically adjusting processing parameters between a first and a second step, and means for stabilising the plasma during the transition between the first and second steps.

20 34. A plasma processing apparatus according to Claim 33, wherein the stabilising means comprises a matching unit for matching the impedance of the plasma to the impedance of a power supply which supplies power to the plasma.

35. A plasma processing apparatus according to Claim 33
25 or 32, wherein the stabilising means comprises means to vary the RF power supply frequency, or means for reducing the variation of the pressure in the chamber between the first and second steps.

00674925.110800

36. A method of processing a workpiece in a chamber substantially as hereinbefore described with reference to the accompanying drawings.

37. A plasma processing apparatus substantially as
5 hereinbefore described, with reference to, and as illustrated in, the accompanying drawings.

09574925.110800

ABSTRACT

"Method and apparatus for stabilising a plasma"

00574925.110800

A workpiece is processed in a chamber by striking a plasma in the chamber, treating the workpiece by cyclically adjusting the processing parameters between at least a first step having a first set of processing parameters and a second step having a second set of process parameters, wherein the plasma is stabilised during the transition between the first and second steps.

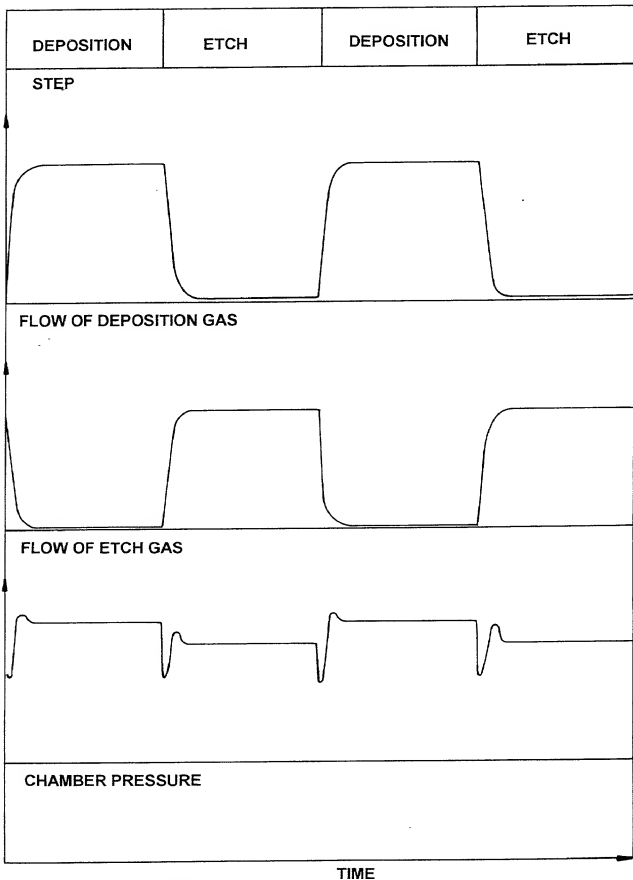
5

10 These steps may comprise cyclic etch and deposition steps. One possibility for stabilising the plasma is by matching the impedance of the plasma to the impedance of the power supply which provides energy to the plasma, by means of a matching unit which can be controlled in a variety of ways

15 depending upon the step type or time during the step. Another possibility is to prevent or reduce substantially variation in the pressure in the chamber between the first and second steps.

[FIGURE 4]

1/7

**Fig. 1**

2/7

DEPOSITION	ETCH	DEPOSITION	ETCH
------------	------	------------	------

STEP

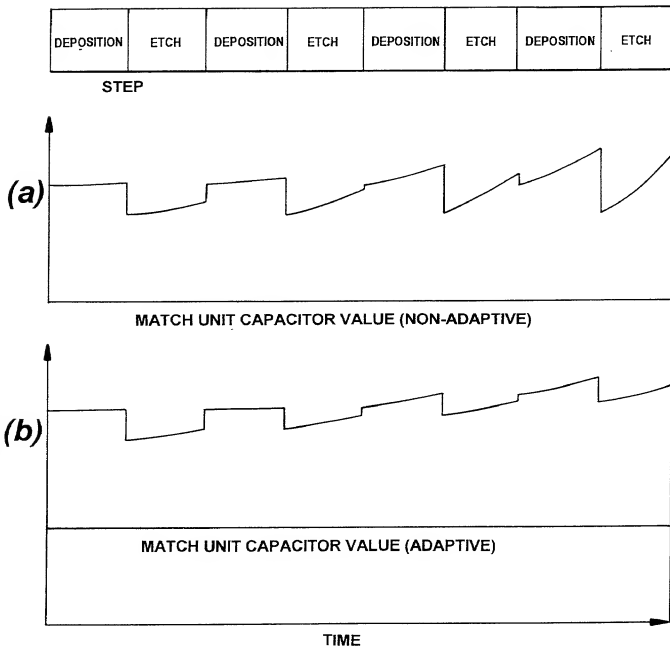
DRIVE MATCHING UNIT CAPACITORS TO PRE-DETERMINED VALUES FOR DEPOSITION	<u>AUTO MATCH ENABLED</u>	DRIVE MATCHING UNIT CAPACITORS TO PRE-DETERMINED VALUES FOR ETCH	<u>AUTO MATCH ENABLED</u>	DRIVE MATCHING UNIT CAPACITORS TO PRE-DETERMINED VALUES FOR DEPOSITION	<u>AUTO MATCH ENABLED</u>	DRIVE MATCHING UNIT CAPACITORS TO PRE-DETERMINED VALUES FOR ETCH	<u>AUTO MATCH ENABLED</u>
---	---------------------------	---	---------------------------	---	---------------------------	---	---------------------------

MATCHING UNIT STATUS

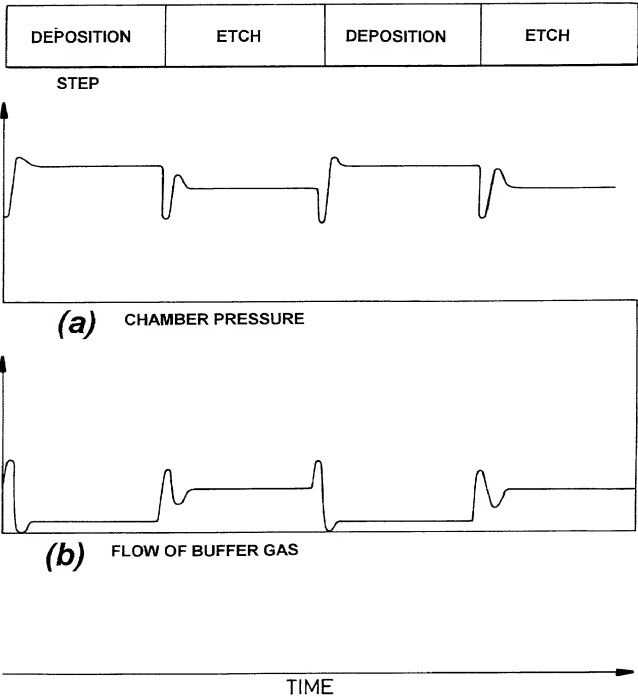
TIME

Fig. 2

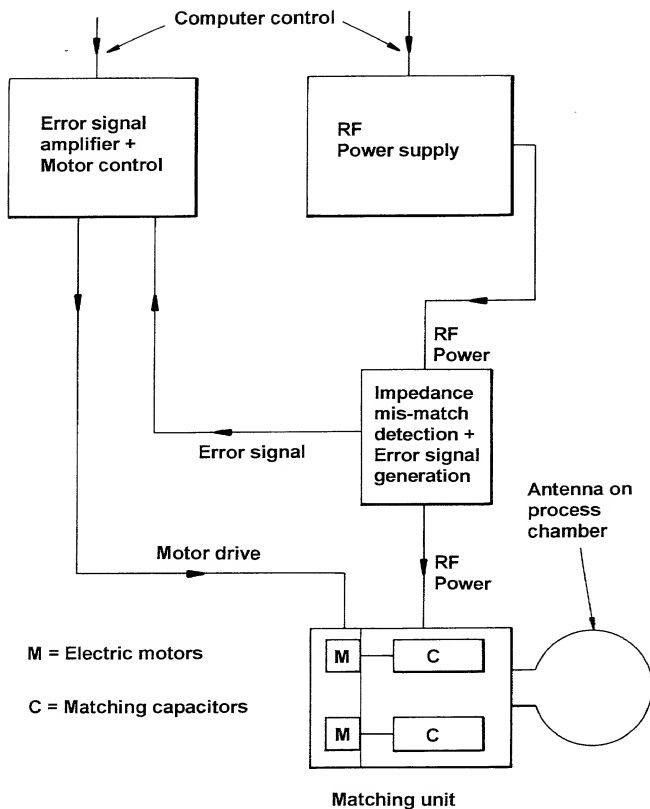
3/7

*Fig. 3*

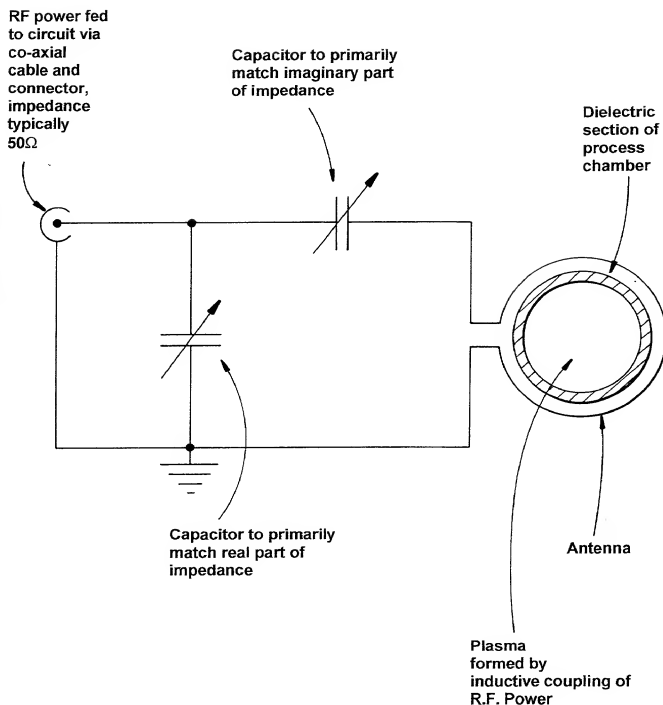
4/7

**Fig. 4**

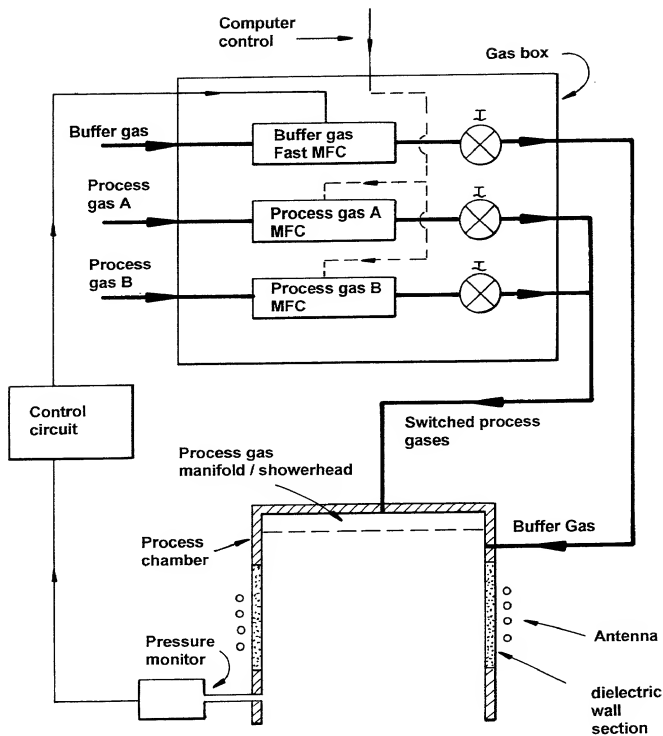
5/7

*Fig. 5*

6/7

**Fig. 6**

7/7



MFC = Mass flow controller

I = Isolation valve (if required)

Fig. 7

DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

(X) Original () Supplemental () Substitute () PCT () Design

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE: CHLOROTRIFLUORINE GAS GENERATOR SYSTEM

of which is described and claimed in:

() the attached specification, or

() the specification in the application Serial No. _____ filed _____
and with amendments through _____ (if applicable), or

(X) the specification in International Application No. PCT/GB00/ 01383 filed 12.04.2000
(12th April 2000)
and as amended on _____ (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
GREAT BRITAIN	9908374.3 /	14th April 1999 /	YES
GREAT BRITAIN	9914689.6 /	24th June 1999 /	YES

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

And I hereby appoint Raymond C. Jones, Reg. No. 34,631 and Adam C. Volentune, Reg. No. 33,289, of the firm of JONES VOLENTUNE, L.L.C., jointly and severally, attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from WYNNE-JONES, LAINE & JAMES as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Kindly direct all correspondence to: JONES VOLENTUNE, L.L.C.
12200 Sunrise Valley Drive
Suite 150
Reston, Virginia 20191
Telephone (703) 715-0870

Full Name of 1st Inventor	FAMILY NAME <u>BHARDWAJ</u>	FIRST GIVEN NAME <u>Jyoti</u>	SECOND GIVEN NAME <u>Kiron</u>
Residence & Citizenship	CITY <u>Bristol</u>	STATE OR COUNTRY Great Britain <u>GBN</u>	COUNTRY OF CITIZENSHIP Great Britain
Post Office Address	ADDRESS 60 Campion Drive, Bristol BS12 0BH, Great Britain	CITY	STATE OR COUNTRY ZIP CODE

Full Name of 2nd Inventor	FAMILY NAME <u>LEA</u>	FIRST GIVEN NAME <u>Leslie</u>	SECOND GIVEN NAME <u>Michael</u>
Residence & Citizenship	CITY <u>Oxfordshire</u>	STATE OR COUNTRY Great Britain <u>GBN</u>	COUNTRY OF CITIZENSHIP Great Britain
Post Office Address	ADDRESS Hideaway, 16B New Road, East Hagbourne, Didcot OX11 9JU Great Britain	CITY	STATE OR COUNTRY ZIP CODE

Full Name of 3rd Inventor	FAMILY NAME <u>GUIBARRA</u>	FIRST GIVEN NAME <u>Edward</u>	SECOND GIVEN NAME
Residence & Citizenship	CITY <u>Cardiff</u>	STATE OR COUNTRY Great Britain <u>GBN</u>	COUNTRY OF CITIZENSHIP Great Britain
Post Office Address	ADDRESS 65 St. Isan Road, Heath, Cardiff CF4 4LW Great Britain	CITY	STATE OR COUNTRY ZIP CODE

09574425-10800

Full Name of 4th Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of 5th Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor Jyoti Kiron BHARDWAJ Date 23rd October 2000
 2nd Inventor Leslie Michael LEA Date 23 October 2000
 3rd Inventor Edward GUIBARRA Date 23/10/00
 4th Inventor _____ Date _____
 5th Inventor _____ Date _____

Applicant Reference No.: STS.31 Any Docket No.: _____